


2. 线性调整率

测试条件：输入电压 10~30V，输出电压 12V，电流 0.1A，1.0A，1.5A。

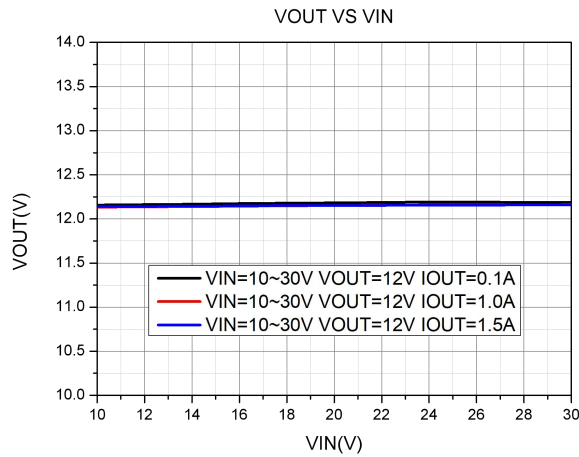

3. 负载调整率

测试条件：输入电压 10V/12V/24V/30V，输出电压 12V，输出电流 0.1~1.5A。

